


TURBO

50/70/90

GENERATEUR D'AIR CHAUD
HOT AIR BLOWER
GENERADOR DE AIRE CALIENTE



www.systemel-international.com

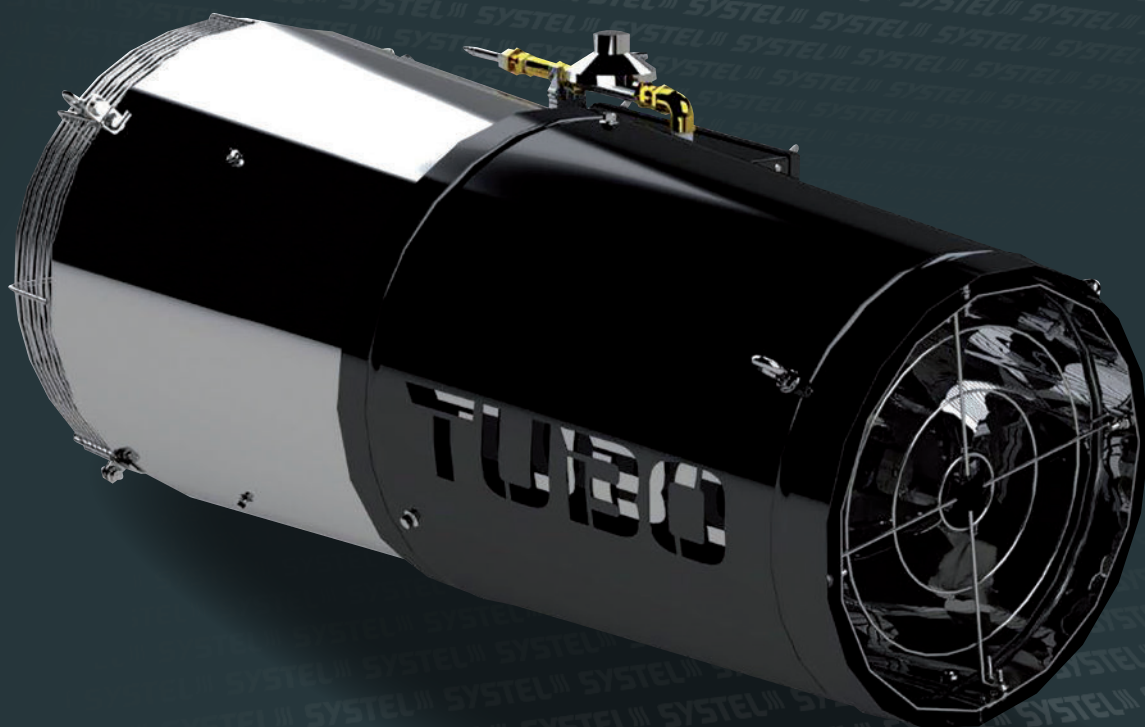

Retrouvez la version
en ligne sur notre site !
Find the online version
on our website !
¡ Encuentre la versión
en línea en nuestro sitio !

SYSTEMEL Heating mastermind






GENERATEUR D'AIR CHAUD
HOT AIR BLOWER
GENERADOR DE AIRE CALIENTE

TUBO 
50/70/90

TUBO 90



TUBO 70




TABLEAU PUISSANCE/CONSOMMATION
TABLE POWER/CONSUMPTION - CUADRO RELACIÓN POTENCIA/CONSUMO

MODELES MODELS MODELOS	Puissance Power Potencia	British Thermal Unit	Consommation propane G31 Propan consumption G31 Consumo de propano G31	Consommation gaz naturel G20 Natural gas consumption G20 Consumo de gas natural G20	Cubic Foot per Minute	Débit d'air Air flow Caudal de aire
TUBO 50	50 KW	170 600 BTU/H	3,2 KG/H	4,45 M ³ /H	840 CFM	1400 M ³ /H
TUBO 70	70 KW	238 840 BTU/H	4,8KG/H	6,5 M ³ /H	1800 CFM	3000 M ³ /H
TUBO 90	87 KW	296 844 BTU/H	6,3 KG/H	8,4 M ³ /H	2700 CFM	4500 M ³ /H

CARACTÉRISTIQUES - CHARACTERISTICS - CARACTERISTICAS

Générateur gaz on/off.
On/off gas blower.
Generador gas on/off.

Générateur intérieur.
Inside blower.
Generador interior.

Fabrication inox.
Stainless steel conception.
Fabricación en acero inoxidable.

Chambre de combustion
en inox réfractaire.
Combustion chamber

in refractory stainless steel.
Cámara de combustión en acero
inoxidable refractario.

Injecteur inox.
Stainless steel injector.
Inyector de acero inoxidable.

Pressostat.
Pressure switch.
Interruptor de presión.

Ventilateur EC.
EC fan.
Ventilator EC.

Pression d'utilisation.
Use pressure.
Presión de utilización.

Propane : 37 mbars
propan : 37 mbars
propano : 37 mbars

Gaz naturel : 20, 25, 30, 50 mbars
(selon pays).
Natural gas : 20, 25, 30, 50 mbars
(depending on countries).
Gas natural : 20, 25, 30, 50 mbars
(dependiendo del país).

AVANTAGES - ADVANTAGES - VENTAJAS

Faible émission de CO, CO2 et NOX.
Low emission of CO, CO2 and NOX.
Baja emission de CO, CO2 y NOX.

Jet d'air supérieur à 40 mètres.
Air jet greater than 40 meters.
Chorro de aire superior a 40 metros.

Entretien aisé.
Easy maintenance.
Mantenimiento fácil.

Boîtier de contrôle avec statut
permanent de l'appareil par un
voyant LED.
Electronic control with permanent
statut of device with a led light.
Caja de control con estatuto
permanente del aparato con una
luz led.

Faible bruit - *Low noise - Ruido bajo*
TUBO 50 : 70 DB
TUBO 70 : 75 DB
TUBO 90 : 80 DB

www.systemel-international.com 

SYSTEMEL - 4, rue de l'Essart Rocher - 44140 LE BIGNON - France
Tél. : 00 33 (0)2 51 85 25 55 - Fax: 00 33 (0)2 51 85 24 68 - Email: systemel@systemel-international.com

SYSTEMEL 
Heating mastermind